


TECHNICAL SPECIFICATIONS NT4 HYBRID

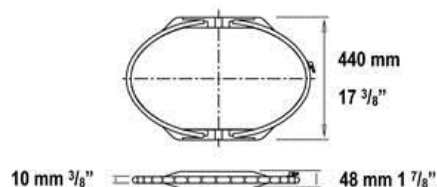

NT4 HYBRID

Max. operating pressure	12 bar
Max. lifting capacity	70 tonnes
Max. lifting capacity at max. lifting height	9.5 tonnes
Insertion height	10 mm / 48 mm
Max. lifting height	N x 440 mm
Effective lifting height	N x 392 mm
Volume	99 liter
Max. air contents	1,287 liter
Temperature range	-20 °C till +65 °C
Weight	15.5 kg
Safety factor	> 4

ACCESSORIES	Art. Nr.	ACCESSORIES	Art. Nr.
Valise NT4 Hybrid	8700.0320	Shut off hose 2m / red / rubber	8700.1352
Accessory case	8700.0795	Shut off hose 2m / yellow / rubber	8700.1357
Regulator c/w 2m black rubber inlet hose	8700.0570	Shut off hose 2m / green / rubber	8700.1362
Handheld dual controller 12 bar	8700.0552	Shut off hose 2m / blue / rubber	8700.1367
Dual air cylinder connector	8700.0620	Shut off hose 2m / red	8700.1258
Delivery hose 12 bar / 8m / red / rubber	8700.1332	Shut off hose 2m / yellow	8700.1263
Delivery hose 12 bar / 8m / yellow / rubber	8700.1337	Shut off hose 2m / green	8700.1273
Delivery hose 12 bar / 8m / green / rubber	8700.1342	Shut off hose 2m / blue	8700.1283
Delivery hose 12 bar / 8m / blue / rubber	8700.1347	Connector key	8700.2008
Delivery hose 12 bar / 10m / red	8700.1107	Solid quick connector	8700.2050
Delivery hose 12 bar / 10m / yellow	8700.1112	PowerPlate	8420.0060
Delivery hose 12 bar / 10m / green	8700.1117	PowerPlate plug	8700.2075
Delivery hose 12 bar / 10m / blue	8700.1122	Floor mat	8700.0715
		Floor mat plug	8700.2040

EN-13731
 COMPLIANT



Marian Hoppe Sp.j.
SafeTech
 Technologia dla bezpieczeństwa

ul. Mikołaja Reja 38, Suchy Dwór, 81-198 Gdynia,

tel./fax: +48 58 781 78 55, tel.: +48 58 665 79 93

info@safetech.net.pl, www.safetech.net.pl

RESQTEC®