



# TECHNICAL SPECIFICATIONS NT8 HYBRID

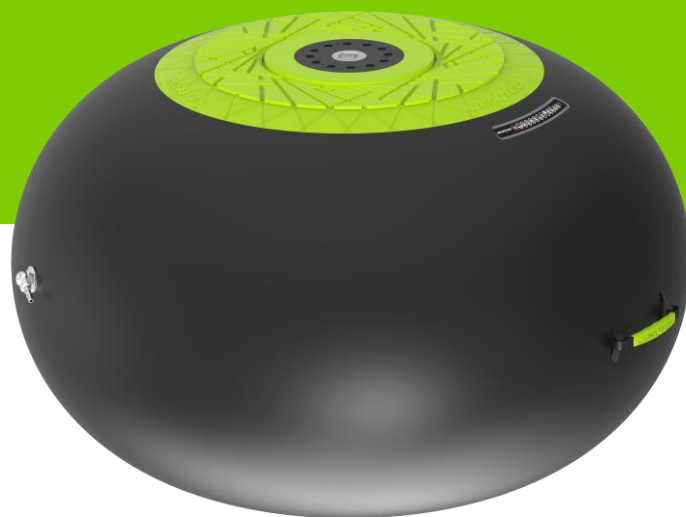

10 mm 3/8" 70 mm 2 3/4"

## NT8 HYBRID

Max. operating pressure	12 bar
Max. lifting capacity	156 tonnes
Max. lifting capacity at max. lifting height	14 tonnes
Insertion height	10 mm / 70 mm
Max. lifting height	N x 665 mm
Effective lifting height	N x 595 mm
Volume	350 liter
Max. air contents	4,550 liter
Temperature range	-20 °C till +65 °C
Weight	38 kg
Safety factor	> 4

## ACCESSORIES

## Art. Nr.

## ACCESSORIES

## Art. Nr.

Storage case NT8 Hybrid	8700.0240	Shut off hose 2m / red / rubber	8700.1352
Accessory case	8700.0795	Shut off hose 2m / yellow / rubber	8700.1357
Regulator c/w 2m black rubber inlet hose	8700.0570	Shut off hose 2m / green / rubber	8700.1362
Handheld dual controller 12 bar	8700.0552	Shut off hose 2m / blue / rubber	8700.1367
Dual air cylinder connector	8700.0620	Shut off hose 2m / red	8700.1258
Delivery hose 12 bar / 8m / red / rubber	8700.1332	Shut off hose 2m / yellow	8700.1263
Delivery hose 12 bar / 8m / yellow / rubber	8700.1337	Shut off hose 2m / green	8700.1273
Delivery hose 12 bar / 8m / green / rubber	8700.1342	Shut off hose 2m / blue	8700.1283
Delivery hose 12 bar / 8m / blue / rubber	8700.1347	Connector key	8700.2008
Delivery hose 12 bar / 10m / red	8700.1107	Solid quick connector	8700.2050
Delivery hose 12 bar / 10m / yellow	8700.1112	PowerPlate	8420.0060
Delivery hose 12 bar / 10m / green	8700.1117	PowerPlate plug	8700.2075
Delivery hose 12 bar / 10m / blue	8700.1122	Floor mat	8700.0715
		Floor mat plug	8700.2040

EN-13731  
 COMPLIANT